

## EDITING FUNCTION SETTING DEVICE AND METHOD, PRINTER DRIVER, AND PRINTER

**Publication number:** JP2001001596 (A)

**Publication date:** 2001-01-09

**Inventor(s):** AIKAWA MASAFUMI

**Applicant(s):** MINOLTA CO LTD

**Classification:**

- international: **B41J21/00; B41J29/38; B41J29/42; G06F3/12; B41J29/42; B41J21/00; B41J29/38; B41J29/42; G06F3/12; B41J29/42; (IPC1-7): B41J29/42; B41J21/00; B41J29/38; G06F3/12**


- European:

**Application number:** JP19990172548 19990618

**Priority number(s):** JP19990172548 19990618

### Abstract of JP 2001001596 (A)

**PROBLEM TO BE SOLVED:** To prevent the execution of printing that is not intended by a user.  
**SOLUTION:** When the same editing function, capable of being set through both of a document producing application 10A and a printing driver 10B, exists, a prohibiting mark is added to an indication by a method wherein the indication of the editing function on a property window is grayed out or the indication itself is omitted so that the setting of the editing function will not be effected through the printer driver 10B.

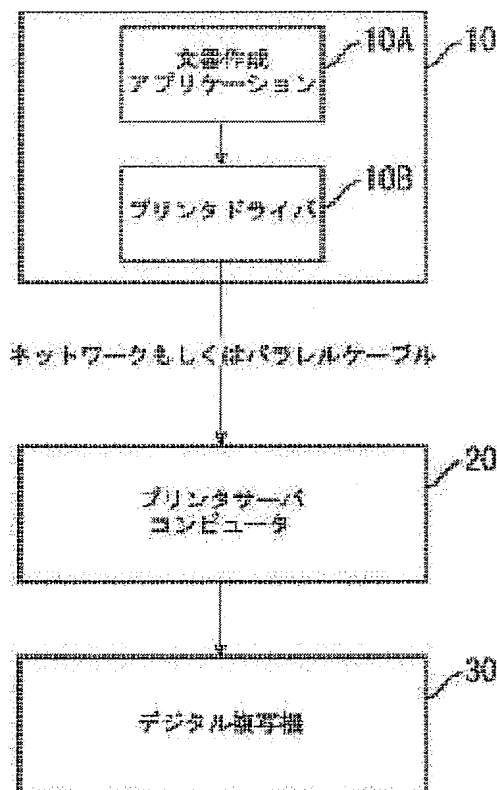

Data supplied from the **esp@cenet** database — Worldwide